


FM Receiver (Model: RFM-11032K)

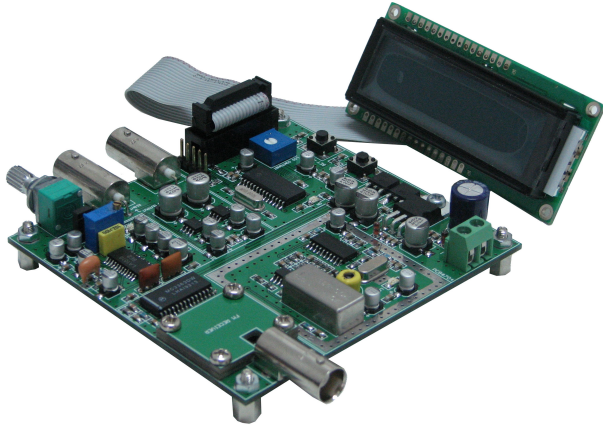

Features

- Frequency range 136 - 174 MHz
- High grade VCO
- Mono or Stereo mode selectable
- SMD design
- LCD display
- Unbalanced audio output
- Audio Output up to 1watt

General Specifications:

| | |
|------------------------|----------------------------|
| Frequency Range | : 136 - 174 MHz |
| Audio Power output | : 1 watt |
| Audio Output impedance | : 8 ohm |
| Receiver sensitivity | : 0.8uV @12dB sinad |
| Frequency step | : 50 KHz |
| Frequency select | : Pushed button UP or DOWN |
| Frequency stability | : +-100Hz |

Physical and Environmental Specifications:

| | |
|-----------------------|------------------------------------|
| General | : FM Receiver |
| Operating Temperature | : -10°C to +50°C (+14°F to +122°F) |
| Storage Temperature | : -40°C to +80°C (-40°F to +176°F) |
| DC input requirement | : 13.8-18VDC@300mA |
| Size | : 10.0 X 9.3 X 2.2 cm. (W x L x H) |
| Weight | : 0.2 Kg. |